


- HOUSING MATERIAL: HEAT RESISTANT PLASTIC UL94 V-0.  
ACTUATOR MATERIAL: HEAT RESISTANT PLASTIC UL94 V-0.
- TERMINAL MATERIAL: PHOSPHOR BRONZE.  
2-1.PLATED WITH BRIGHT TIN(100%) 80u"~150u"  
2-2.PLATED WITH MATTE TIN(100%) 80u"~150u"  
2-3.PLATED WITH GOLD MORE THAN 1u.
- FITTING NAIL MATERIAL: BRASS.  
3-1.PLATED WITH BRIGHT TIN(100%) 80u"~150u"  
3-2.PLATED WITH MATTE TIN(100%) 80u"~150u"
- PART NO. SPECIFICATION:101027-XOXXX0-HF

- |      |         |
|------|---------|
| 1:管装 | 1:雾锡    |
| 2:卷装 | 2:亮锡    |
| 3:袋装 | 3:镀金1u' |
| 4:其他 | 5:镀金3u' |
|      | 6:半金锡   |


Pin数	DIM=A	DIM=B	DIM=C	DIM=D	DIM=E
4	8.50	6.40	1.50	2.55	8.65
5	9.00	6.90	2.00	3.05	9.15
6	9.50	7.40	2.50	3.55	9.65
7	10.00	7.90	3.00	4.05	10.15
8	10.50	8.40	3.50	4.55	10.65
9	11.00	8.90	4.00	5.05	11.15
10	11.50	9.40	4.50	5.55	11.65
11	12.00	9.90	5.00	6.05	12.15
12	12.50	10.40	5.50	6.55	12.65
13	13.00	10.90	6.00	7.05	13.15
14	13.50	11.40	6.50	7.55	13.65
15	14.00	11.90	7.00	8.05	14.15
16	14.50	12.40	7.50	8.55	14.65
17	15.00	12.90	8.00	9.05	15.15
18	15.50	13.40	8.50	9.55	15.65
19	16.00	13.90	9.00	10.05	16.15
20	16.50	14.40	9.50	10.55	16.65
21	17.00	14.90	10.00	11.05	17.15
22	17.50	15.40	10.50	11.55	17.65
23	18.00	15.90	11.00	12.05	18.15
24	18.50	16.40	11.50	12.55	18.65
25	19.00	16.90	12.00	13.05	19.15
26	19.50	17.40	12.50	13.55	19.65
27	20.00	17.90	13.00	14.05	20.15
28	20.50	18.40	13.50	14.55	20.65
29	21.00	18.90	14.00	15.05	21.15
30	21.50	19.40	14.50	15.55	21.65
31	22.00	19.90	15.00	16.05	22.15
32	22.50	20.40	15.50	16.55	22.65
33	23.00	20.90	16.00	17.05	23.15
34	23.50	21.40	16.50	17.55	23.65
35	24.00	21.90	17.00	18.05	24.15
36	24.50	22.40	17.50	18.55	24.65
37	25.00	22.90	18.00	19.05	25.15
38	25.50	23.40	18.50	19.55	25.65
39	26.00	23.90	19.00	20.05	26.15
40	26.50	24.40	19.50	20.55	26.65
41	27.00	24.90	20.00	21.05	27.15
42	27.50	25.40	20.50	21.55	27.65
43	28.00	25.90	21.00	22.05	28.15
44	28.50	26.40	21.50	22.55	28.65
45	29.00	26.90	22.00	23.05	29.15
46	29.50	27.40	22.50	23.55	29.65
47	30.00	27.90	23.00	24.05	30.15
48	30.50	28.40	23.50	24.55	30.65
49	31.00	28.90	24.00	25.05	31.15
50	31.50	29.40	24.50	25.55	31.65
51	32.00	29.90	25.00	26.05	32.15
52	32.50	30.40	25.50	26.55	32.65
53	33.00	30.90	26.00	27.05	33.15
54	33.50	31.40	26.50	27.55	33.65
55	34.00	31.90	27.00	28.05	34.15
56	34.50	32.40	27.50	28.55	34.65
57	35.00	32.90	28.00	29.05	35.15
58	35.50	33.40	28.50	29.55	35.65
59	36.00	33.90	29.00	30.05	36.15
60	36.50	34.40	29.50	30.55	36.65

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
	X.		±0.20
	X.X		±0.10
	X.XX		±0.05
	X.XXX		±0.02
	ANG.		±0°30'
▲	增加无卤标识	张运兴	2015-12-07
▲	增加51Pin以上	陈天舒	2013-02-28
SER	REVISIONS	CHK	DATE

客户图 Drawings		北极大电子科技有限公司 BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED		
APPROVED	DATE	COMPUTER NO		101027-XOXXX0-HF
CHECKED	DATE	NAME		
陈天舒	2012-05-24	FPC0.5-8代H2.7后掀式(1/2)		
DRAWN	DATE	SIZE	SCALE	REV
张运兴	2012-05-24	A4	7:1	C

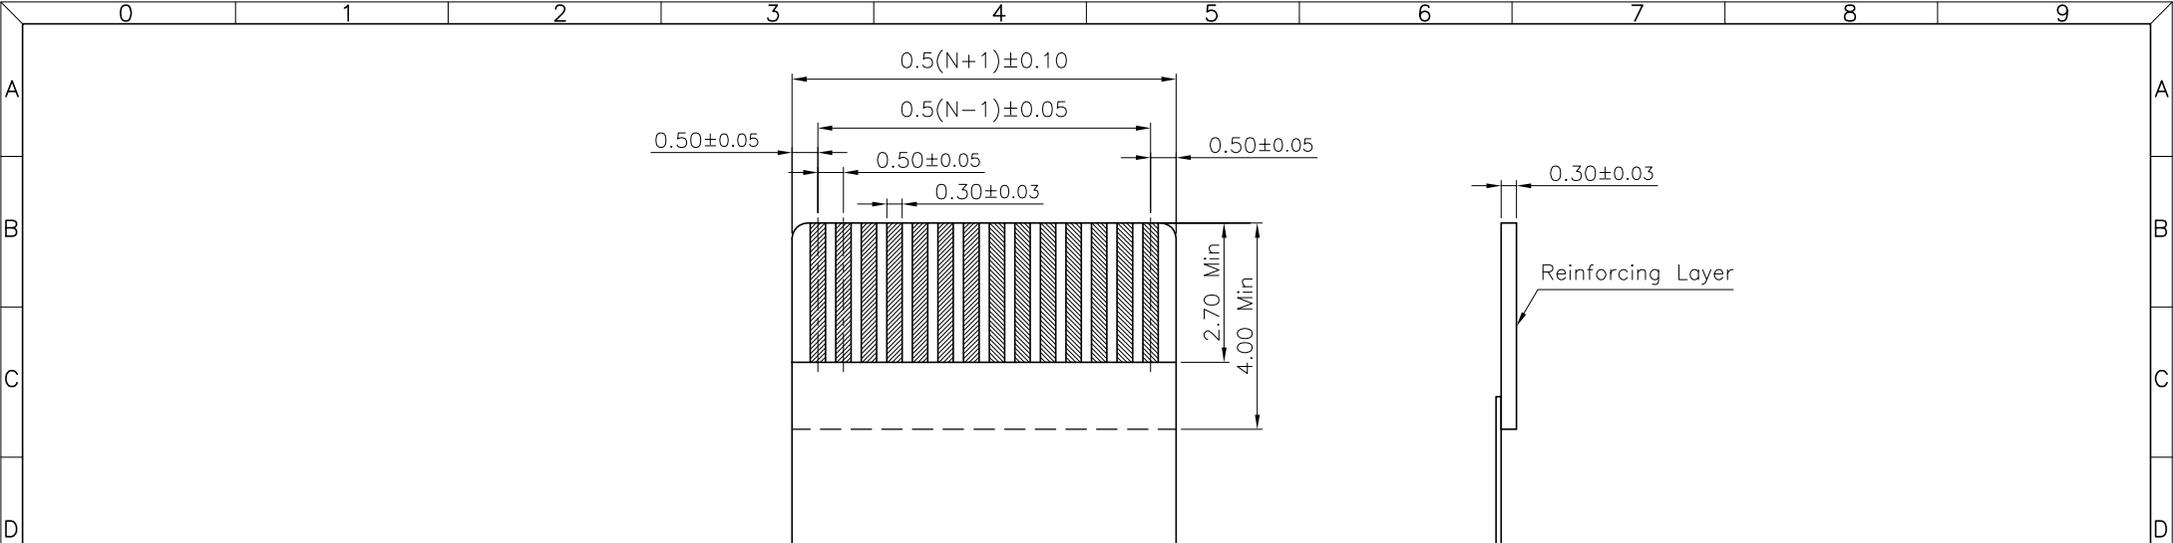

RECOMMENDED FFC/FPC DIMENSION

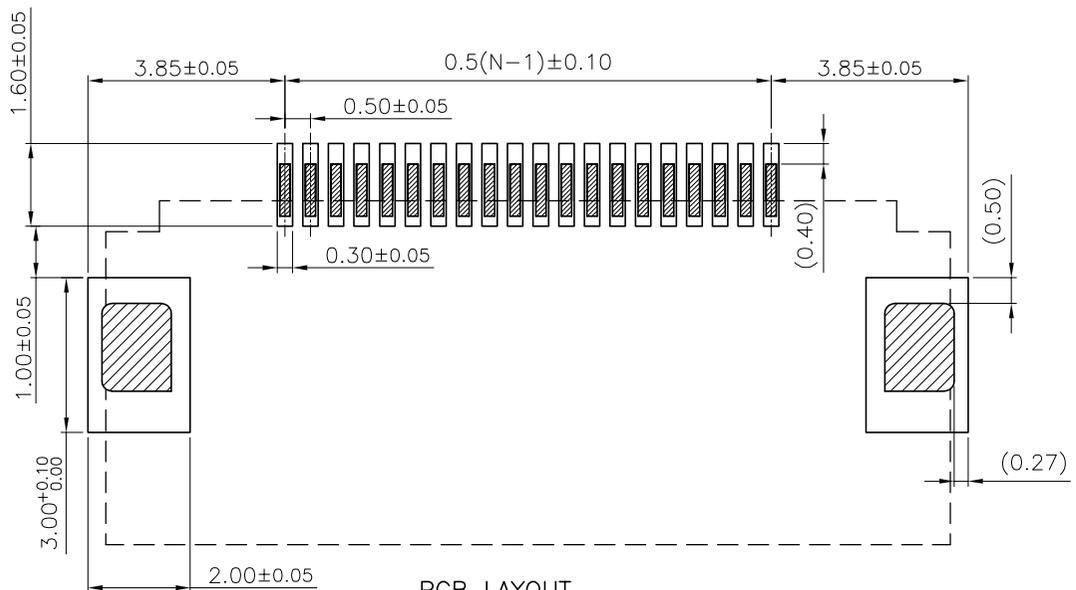


PCB LAYOUT

				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		<b>客户图</b>		<b>北极大电子科技有限公司</b>		
						<b>Drawings</b>		<b>BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED</b>		
						APPROVED		DATE		COMPUTER NO
										<b>101027-X0XXX0-HF</b>
						CHECKED		DATE		NAME
						陈天舒		2012-05-24		FPC0.5-8代H2.7后掀式(2/2)
						DRAWN		DATE		SIZE
						张运兴		2012-05-24		SCALE
										REV
										C
SER		REVISIONS	CHK	DATE	UNIT					
					MM					

X.			
X.X	±0.20		
X.XX	±0.10		
X.XXX			
ANG.	±0°30'		

Pin数	A0	A1	B0	B1	K0	F	W	卷数量
4			9.30	7.30		10.25	24	
5			9.80	7.80		10.25	24	
6			10.30	8.30		10.25	24	
7			10.80	8.80		10.25	24	
8			11.30	9.30		10.25	24	
9			11.80	9.80		10.25	24	
10			12.30	10.30		14.25	32	
11			12.80	10.80		14.25	32	
12			13.30	11.30		14.25	32	
13			13.80	11.80		14.25	32	
14			14.30	12.30		14.25	32	
15			14.80	12.80		14.25	32	
16			15.30	13.30		14.25	32	
17			15.80	13.80		14.25	32	
18			16.30	14.30		14.25	32	
19			16.80	14.80		14.25	32	
20			17.30	15.30		20.25	44	
21			17.80	15.80		20.25	44	
22			18.30	16.30		20.25	44	
23			18.80	16.80		20.25	44	
24			19.30	17.30		20.25	44	
25			19.80	17.80		20.25	44	
26			20.30	18.30		20.25	44	
27			20.80	18.80		20.25	44	
28			21.30	19.30		20.25	44	
29			21.80	19.80		20.25	44	
30			22.30	20.30		20.25	44	
31	8.00	6.00	22.80	20.80	2.85	20.25	44	1500PC S/卷
32			23.30	21.30		20.25	44	
33			23.80	21.80		20.25	44	
34			24.30	22.30		20.25	44	
35			24.80	22.80		20.25	44	
36			25.30	23.30		20.25	44	
37			25.80	23.80		20.25	44	
38			26.30	24.30		20.25	44	
39			26.80	24.80		20.25	44	
40			27.30	25.30		20.25	44	
41			27.80	25.80		20.25	44	
42			28.30	26.30		20.25	44	
43			28.80	26.80		20.25	44	
44			29.30	27.30		20.25	44	
45			29.80	27.80		20.25	44	
46			30.30	28.30		20.25	44	
47			30.80	28.80		20.25	44	
48			31.30	29.30		20.25	44	
49			31.80	29.80		20.25	44	
50			32.30	30.30		20.25	44	
51			32.80	30.80		20.25	44	
52			33.30	31.30		20.25	44	
53			33.80	31.80		26.25	56	
54			34.30	32.30		26.25	56	
55			34.80	32.80		26.25	56	
56			35.30	33.30		26.25	56	
57			35.80	33.80		26.25	56	
58			36.30	34.30		26.25	56	
59			36.80	34.80		26.25	56	
60			37.30	35.30		26.25	56	

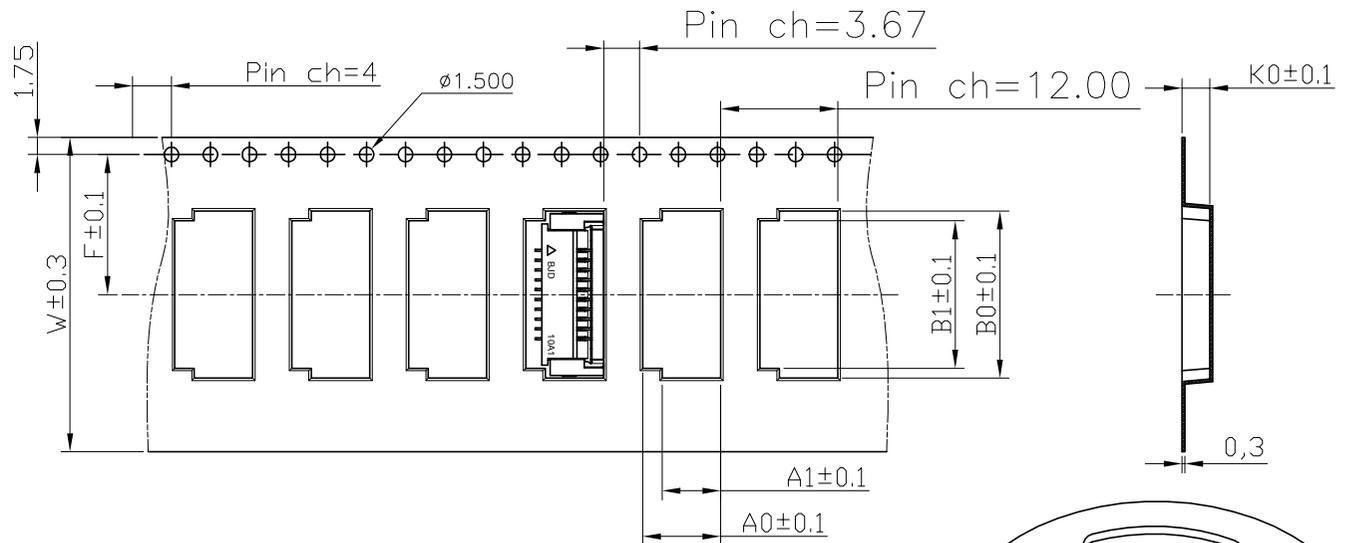

User Direction of Unreeling

PART NO. SPECIFICATION: 101027-20XXX0

- 1:管装
- 2:卷装
- 3:袋装
- 4:其他
- 5:雾锡
- 6:亮锡
- 7:镀金1u'
- 8:镀金3u'
- 9:半金锡

PIN数	胶芯g	胶芯比重	后盖g	后盖比重	端子g	端子比重	垫片	垫片比重	总重量
4	0.0907	42.91%	0.04042	19.12%	0.03826	18.10%	0.042	19.87%	0.21138
8	0.1063	38.71%	0.04978	18.13%	0.07652	27.87%	0.042	15.29%	0.2746
10	0.1141	37.26%	0.05446	17.79%	0.09565	31.24%	0.042	13.72%	0.30621
20	0.1531	32.98%	0.07786	16.77%	0.1913	41.21%	0.042	9.05%	0.46426
30	0.1921	30.87%	0.10126	16.27%	0.28695	46.11%	0.042	6.75%	0.62231
41	0.235	29.52%	0.127	15.95%	0.392165	49.26%	0.042	5.28%	0.796165
51	0.274	28.71%	0.1504	15.76%	0.487815	51.12%	0.042	4.40%	0.954215

				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		<b>包装图</b>		<b>北极大电子科技有限公司</b>				
				X. ±0.1		<b>Packaging Figure</b>		<b>BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED</b>				
				X.X ±0.05		APPROVED		DATE		COMPUTER NO		
				X.XX ±0.05		CHECKED		DATE		NAME		
				X.XXX ±0.05		陈天舒		2011-10-11		FPC0.5-8代H2.7后掀式卷装图		
				ANG. ±0°30'		DRAWN		DATE		SIZE	SCALE	REV
▲ 增加51Pin以上				陈天舒	2013-02-28	张运兴		2011-10-11		A4	3:4	B
SER	REVISIONS			CHK	DATE	MM						